

## SECTION 11-I

### REMOTE CONTROL OUTSIDE MIRROR, SEAT BELTS AND FOUR NOTE HORN

#### CONTENTS OF SECTION 11-I

Paragraph	Subject	Page
11-30	Remote Control Outside Mirror Installation . . . . .	11-155
11-31	Seat Belt Installation . . . . .	11-155
11-32	Four Note Horn . . . . .	11-155

#### 11-30 REMOTE CONTROL OUTSIDE MIRROR INSTALLATION

Figures 11-194 and 11-195 show the installation of remote control outside mirror. This mirror is a factory or dealer installed accessory.

#### 11-31 SEAT BELT INSTALLATION

Figures 11-196 through 11-201 shows the seat belt installation. The front seat belts are factory or dealer installed. The rear seat belts are only dealer installed.

#### 11-32 FOUR NOTE HORN—4700 SERIES

The installation of the optional four note horn for the 4700 Series is shown in Figures 11-202, 11-203 and 11-204.

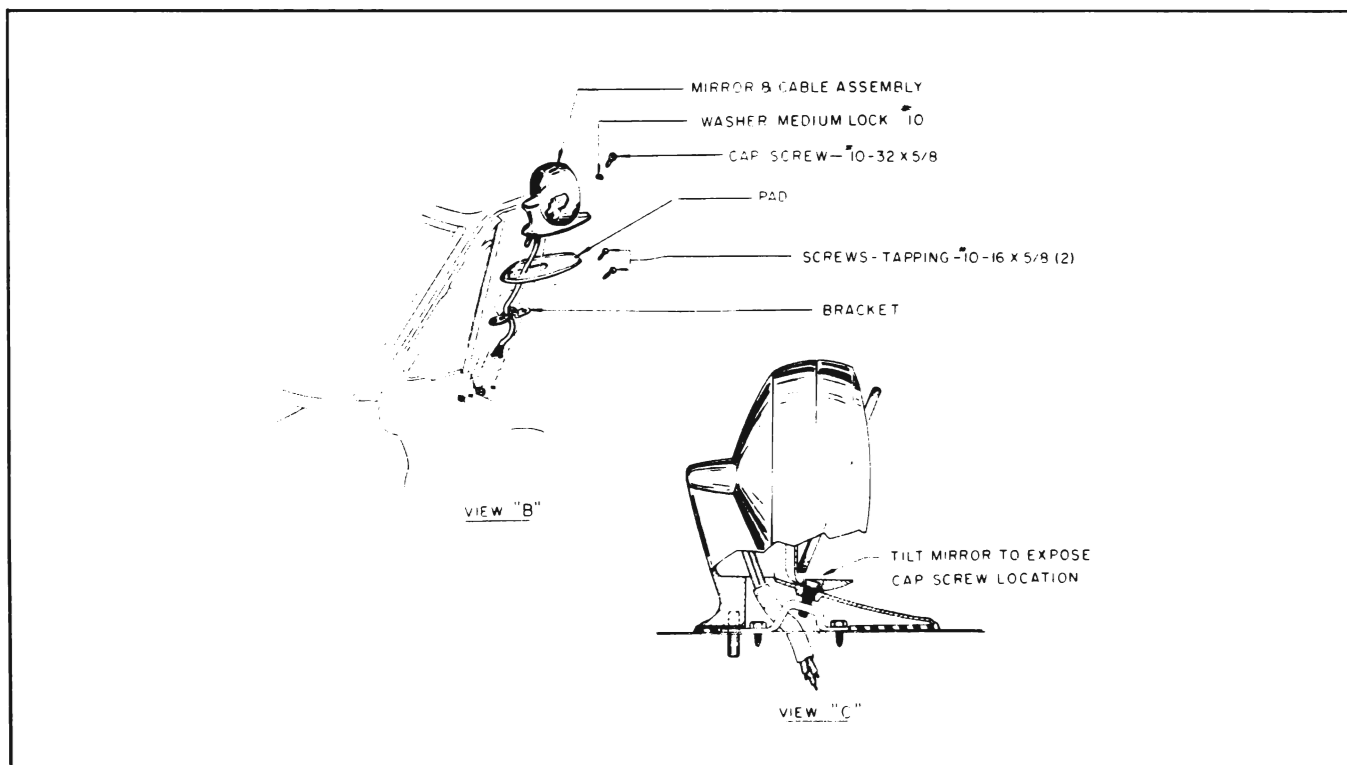


Figure 11-194—Remote Control Outside Mirror Installation—View 1

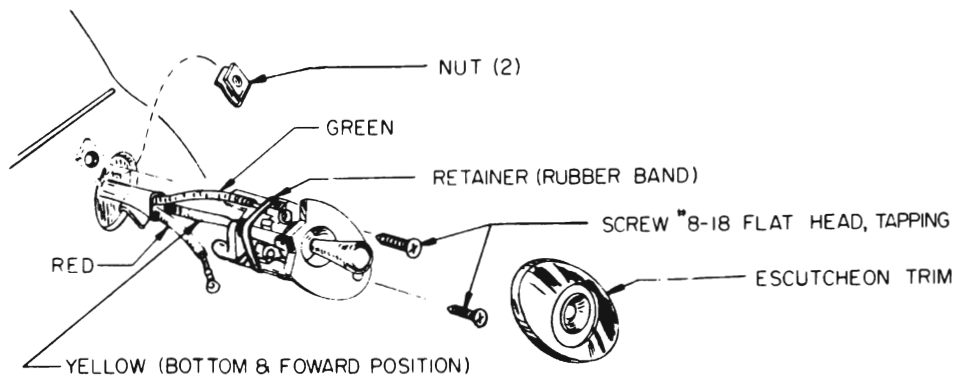
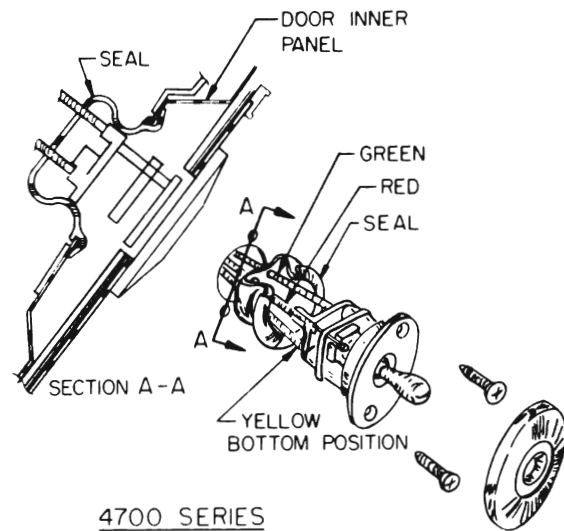


Figure 11-195—Remote Control Outside Mirror Installation—View 2

- FRONT SEAT BELT INSTALLATION (BUCKET TYPE ALL JOBS)
- 1: LOCATE RUBBER SEALING PLUGS UNDER CARPET AT BOLT LOCATIONS, BY USING FINGER PRESSURE, OR WITH AN AWL FROM BENEATH THE BODY.
  - 2: CUT HOLE IN CARPET AND EXTRACT RUBBER SEALING PLUGS. (SEE VIEW "A").
  - 3: POSITION BELT ANCHOR PLATES ON FLOOR AND FASTEN IN PLACE WITH SPECIAL BOLTS & WASHERS. SEE VIEW "D"


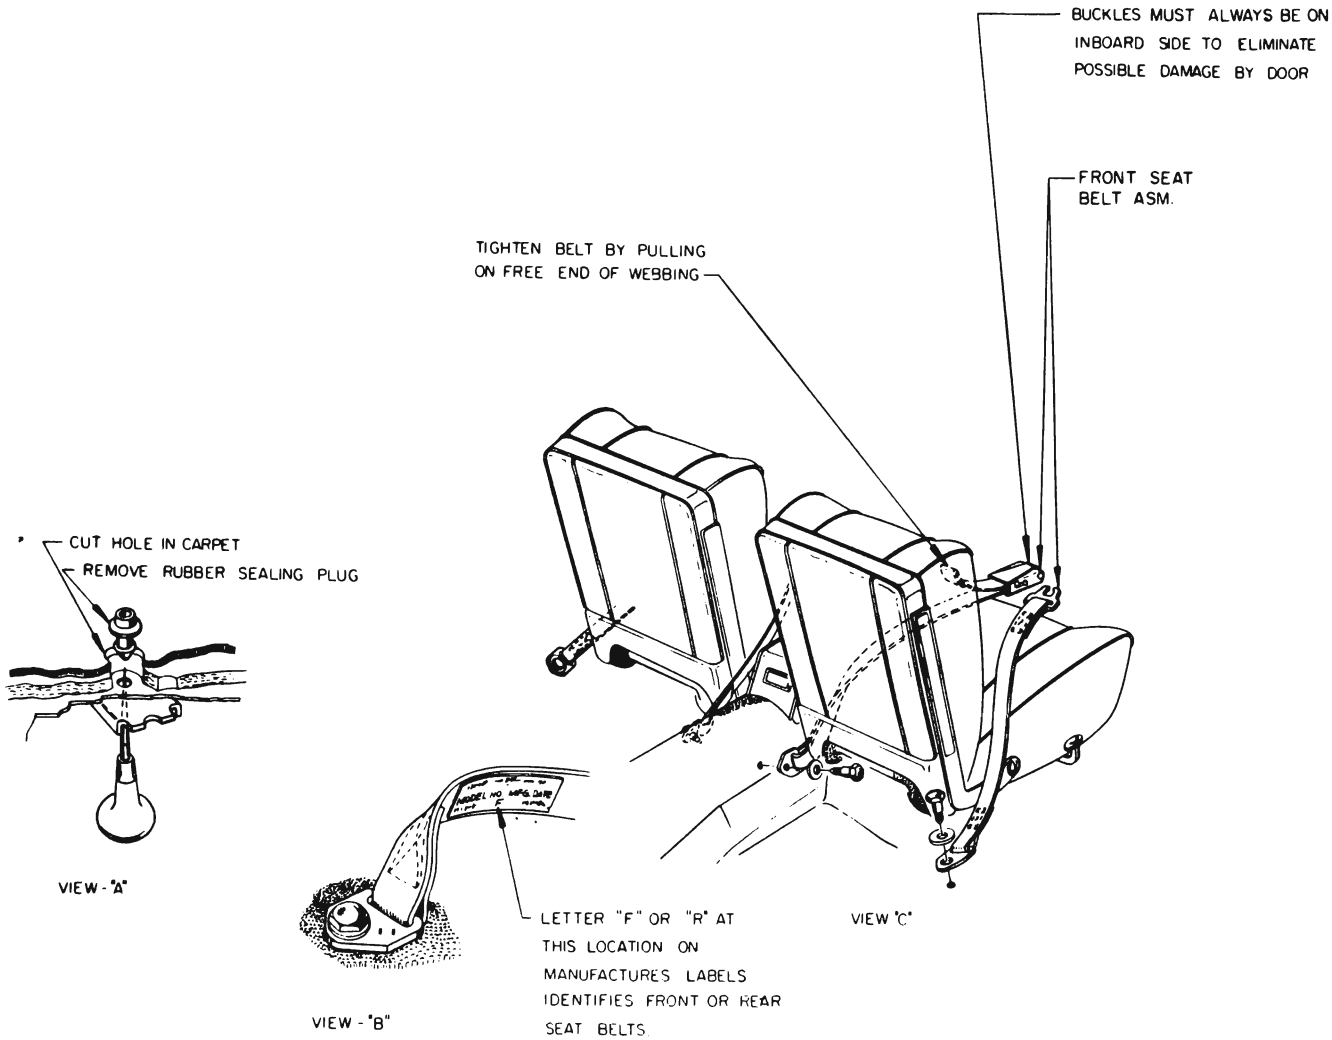


Figure 11-196—Seat Belt Installation—Illustration #1

FRONT SEAT BELT INSTALLATION (BENCH TYPE ALL JOBS)

- 1- LOCATE RUBBER SEALING PLUG UNDER CARPET AT BOLT LOCATIONS BY USING FINGER PRESSURE, OR WITH AN AWL FROM BENEATH THE BODY.
- 2- CUT HOLE IN CARPET AND EXTRACT RUBBER SEALING PLUG. SEE VIEW "F"
- 3- SLIT FABRIC AS SHOWN IN VIEWS "G" "H" & "K"
- 4- THREAD SEAT BELTS FROM TOP SIDE OF SEAT BETWEEN CUSHION & SEAT BACK THRU SLIT IN FABRIC AS SHOWN (VIEWS "G" "H" & "K" EXCEPT ON BUCKET SEAT JOBS, WHERE BELTS ARE ROUTED ON OUTSIDE OF SEATS.
- 5- ASSEMBLE TRIM COVERS ON INBOARD SEAT BELTS, TO SEAT BACKS AS SHOWN IN "G" "H" & "K"
- 6- POSITION BOLT ANCHOR PLATES AND FASTEN IN PLACE WITH SPECIAL BOLTS AS SHOWN IN VIEW "D".
- 7- ADJUST BELTS AND LOCATE ON SEAT AS SHOWN IN VIEW "E".

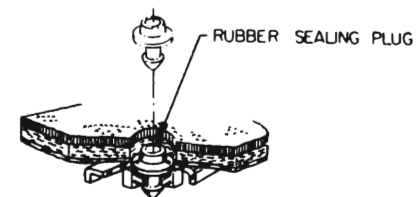

VIEW "F"


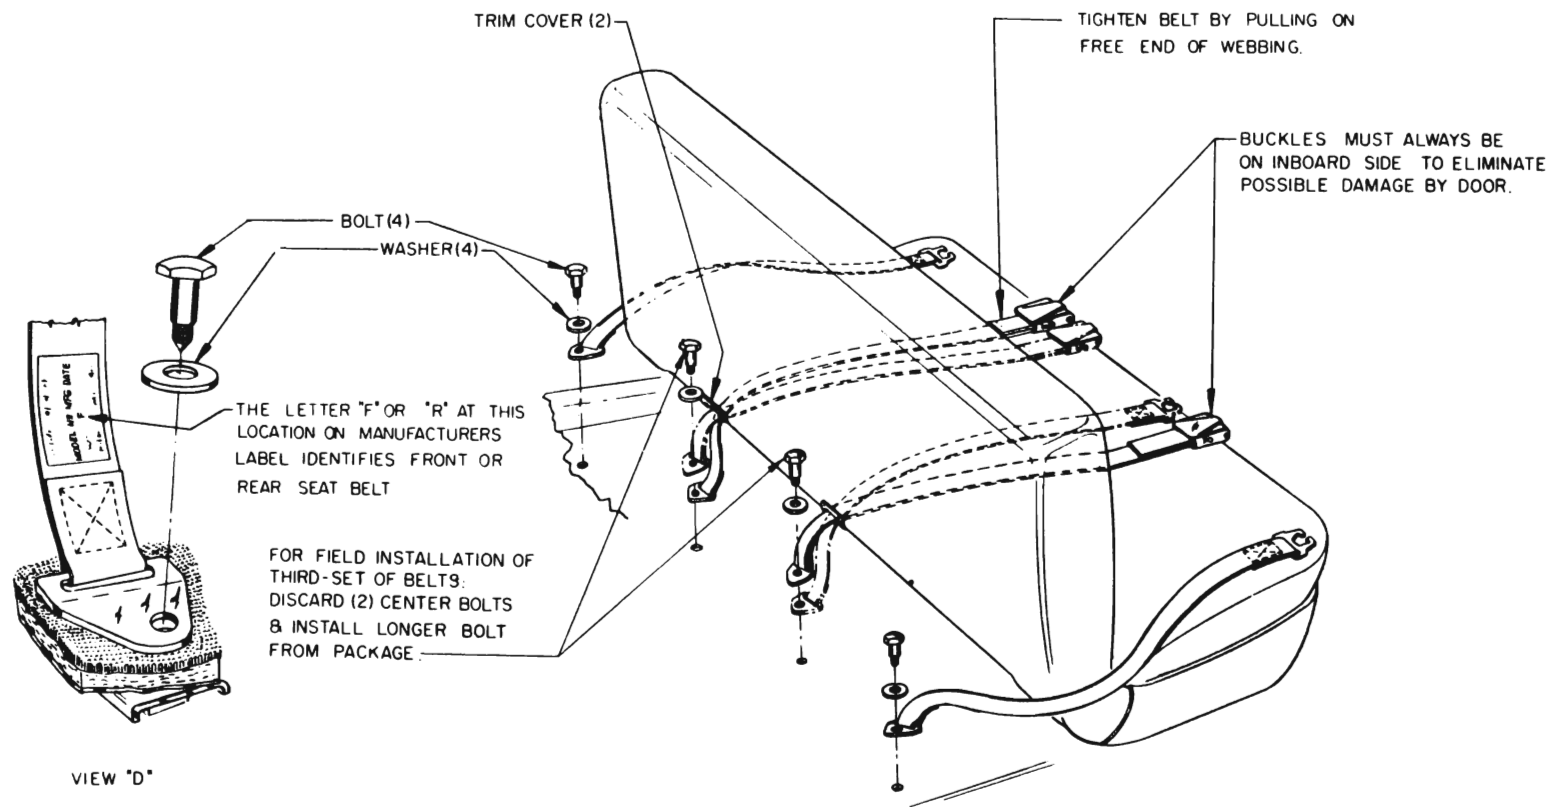


Figure 11-197—Seat Belt Installation—Illustration #2

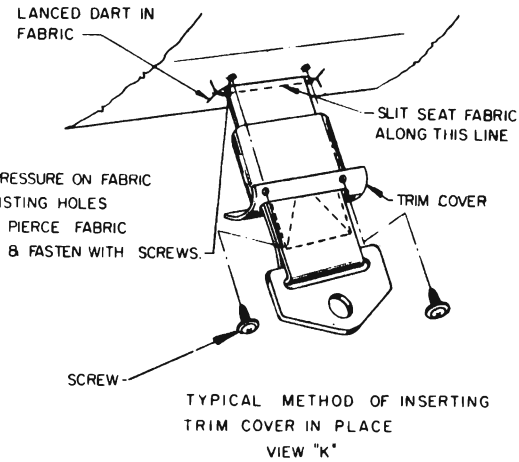

ALL BENCH TYPE FRONT SEATS WITH FOLDING SEAT BACKS. TILT BACK OF SEAT FORWARD AND AT SEWED IN POCKETS PROVIDED, (2-PLACES) APPROX 8 TO 10 INCHES EACH SIDE OF CENTERLINE OF CAR, INSERT KNIFE FROM TOP, DOWN THRU POCKET, AND SLIT OPENING THRU FABRIC AT BOTTOM

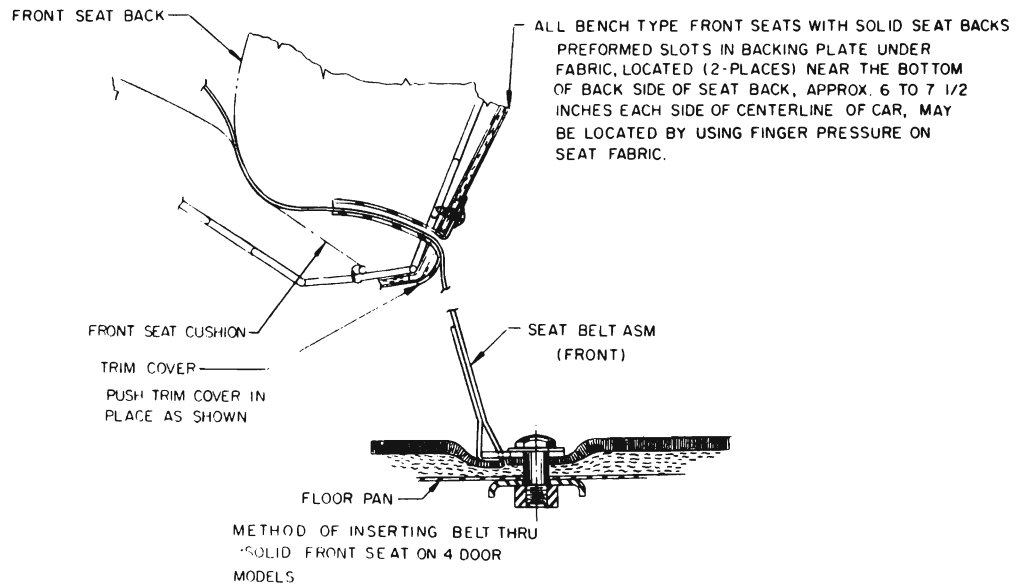
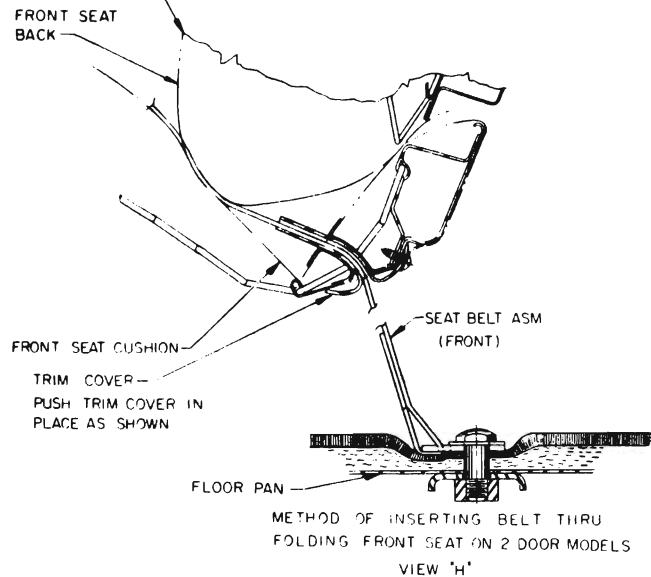


Figure 11-198—Seat Belt Installation—Illustration #3

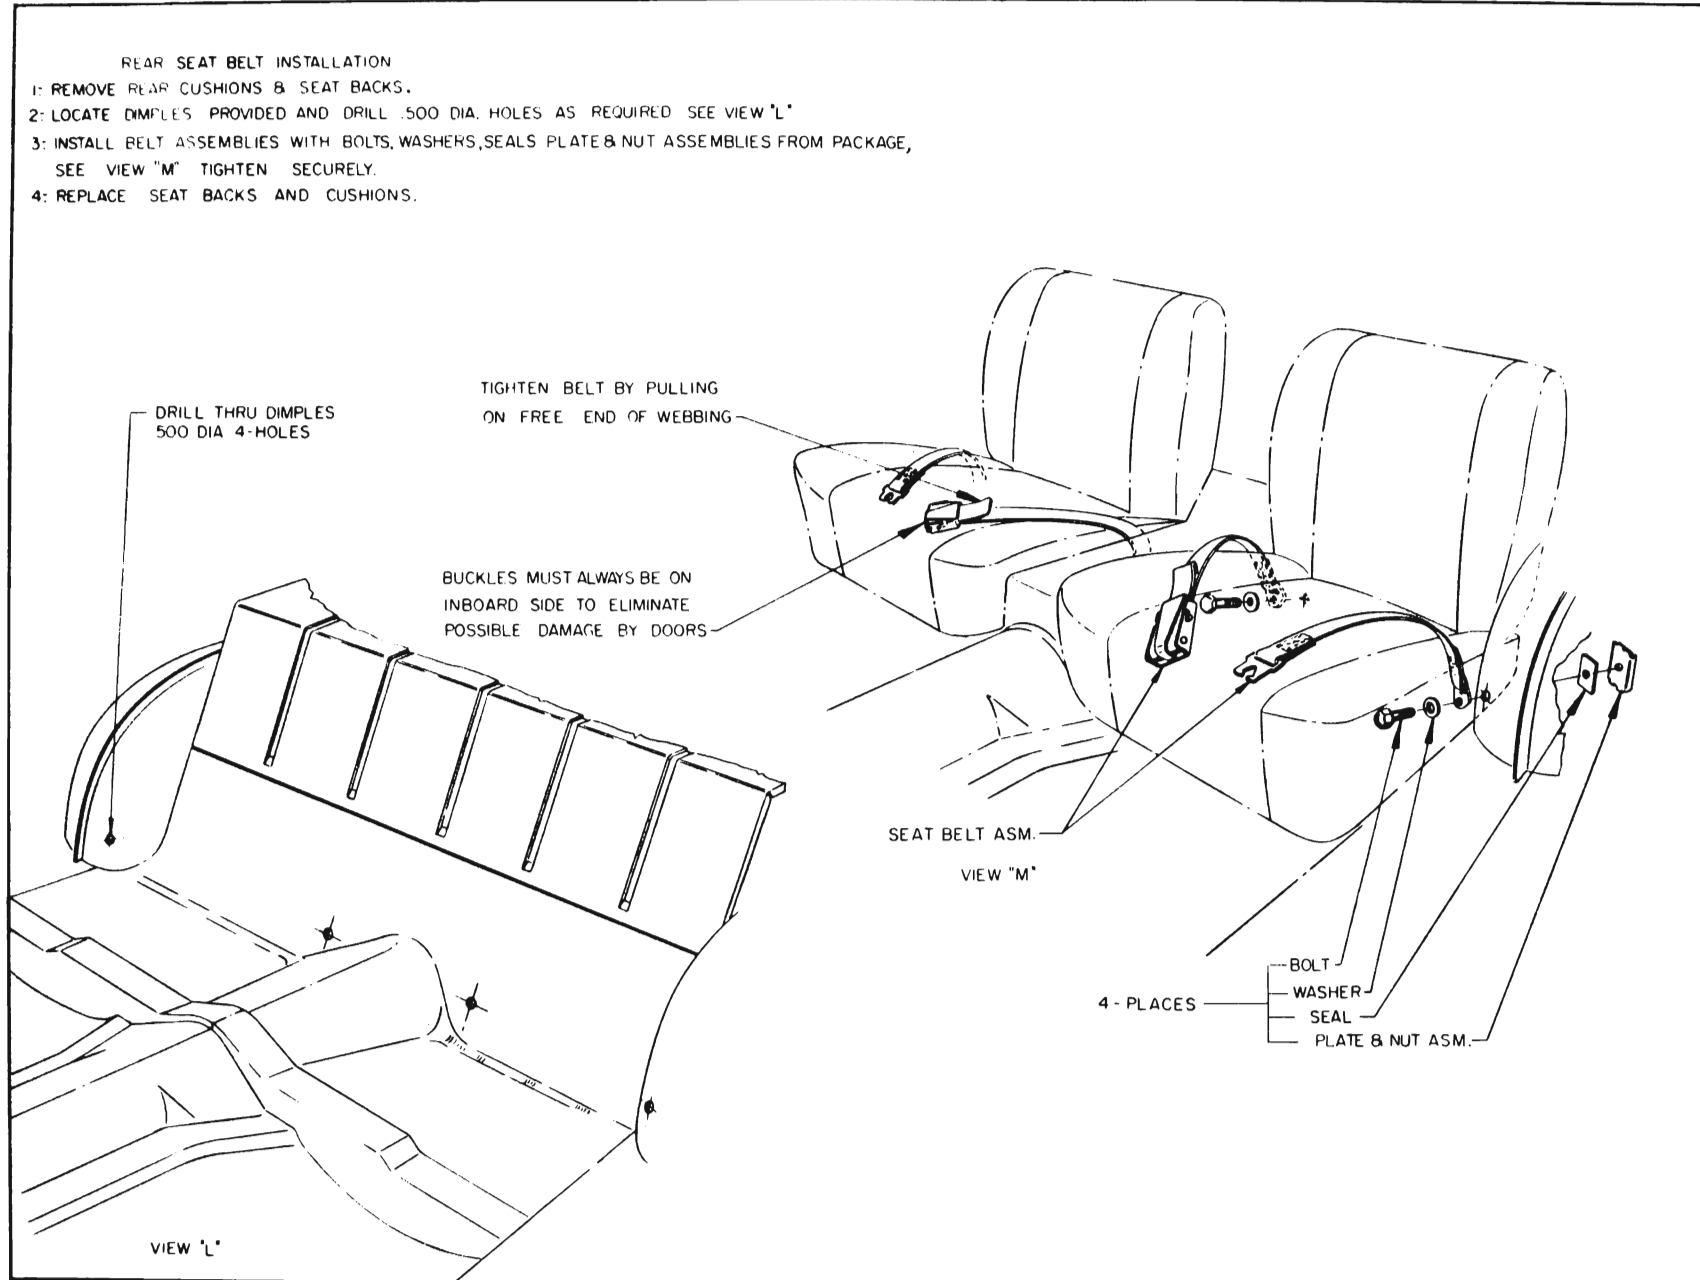


Figure 11-199—Seat Belt Installation—Illustration #4

# REAR SEAT BELT INSTALLATION

- 1: REMOVE REAR CUSHION & SEAT BACK.
- 2: LOCATE DIMPLES PROVIDED & DRILL .500 DIA. 4 HOLES AS SHOWN
- 3: INSTALL BELT ASSEMBLIES BOLTS, SEALS, PLATE & NUT ASSEMBLIES. AS SHOWN TIGHTEN SECURELY.
- 4: REPLACE SEAT BACK & CUSHION AND ARRANGE BELTS AS SHOWN IN VIEW "N"

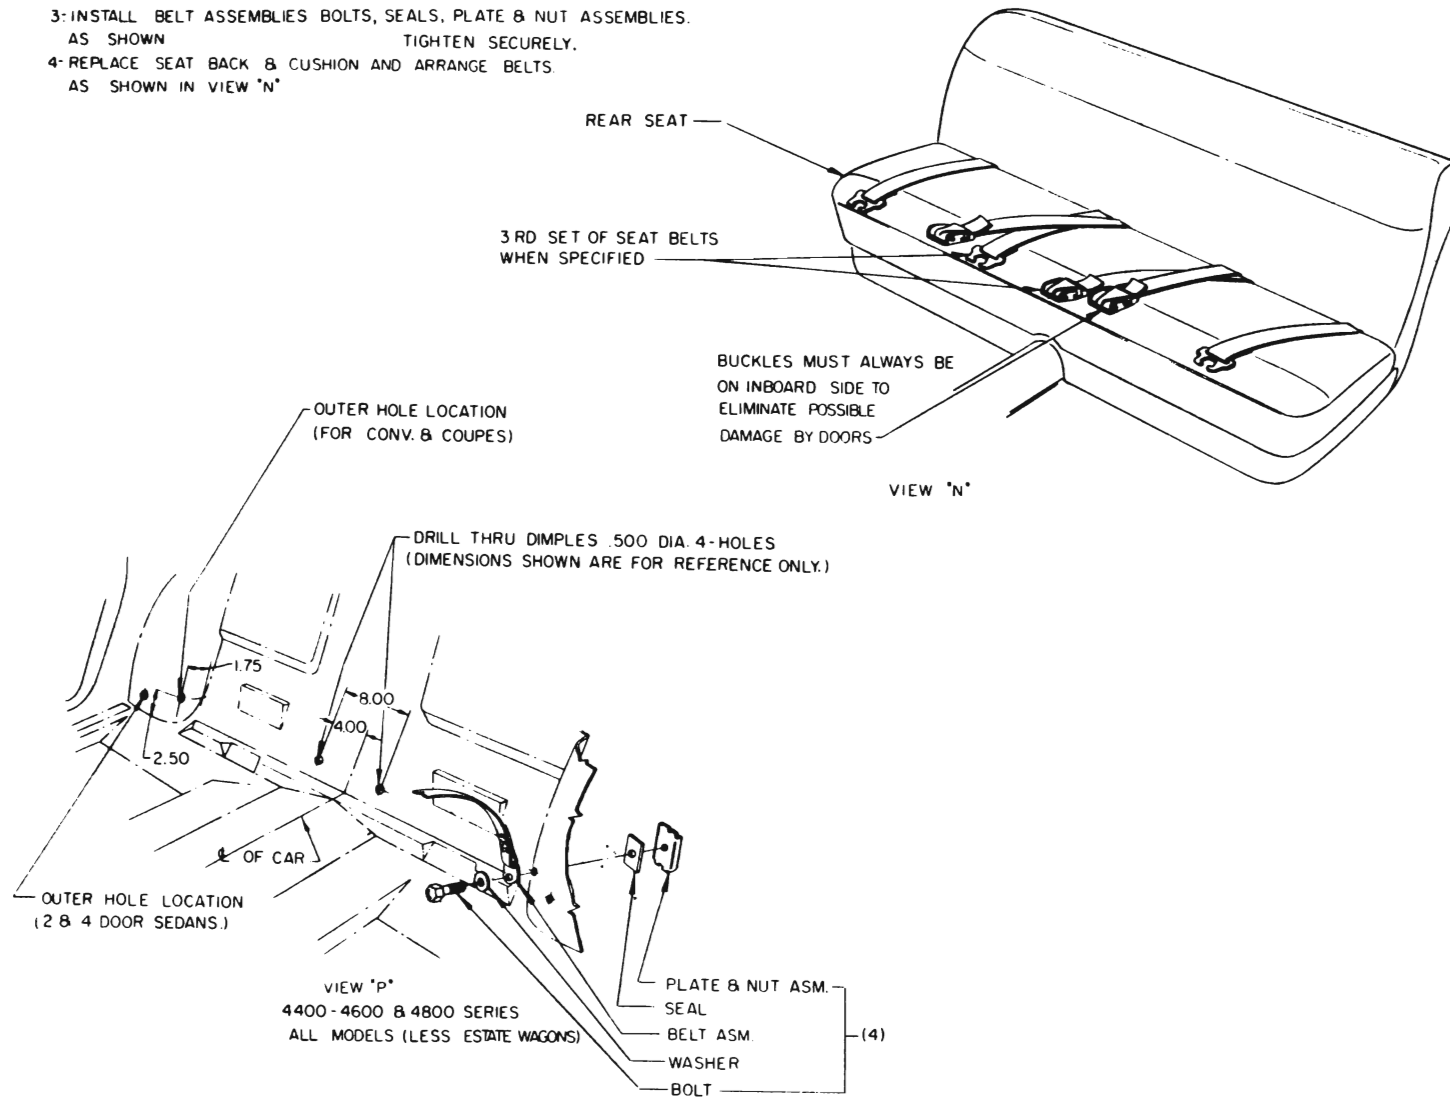




Figure 11-200—Seat Belt Installation—Illustration #5

SEAT BELT INSTALLATION FOR 2ND SEAT (MODEL 4435-4445-4635 ESTATE WAGONS)

- 1- REMOVE SEAT CUSHION
- 2- DRILL .500 DIA. HOLES AS REQUIRED AT LOCATIONS SHOWN IN VIEW "S."
- 3- INSTALL BELT ASSEMBLIES WITH BOLTS, SEALS, PLATE & NUT ASSEMBLIES AS SHOWN IN VIEW "P" SHEET #5. TIGHTEN SECURELY
- 4- REPLACE SEAT CUSHION AND ARRANGE BELTS AS SHOWN IN VIEW "N."

SEAT BELT INSTALLATION FOR 3RD SEAT

- 1- TILT SEAT CUSHION REARWARD.
- 2- LOCATE DIMPLES PROVIDED & DRILL .500 DIA HOLES AS REQUIRED SEE VIEW "R"
- 3- INSTALL BELT ASSEMBLIES WITH BOLTS, SEALS, PLATE & NUT ASSEMBLIES AS SHOWN IN VIEW "P" SHEET #5 TIGHTEN SECURELY.
- 4- REPLACE SEAT CUSHION AND ARRANGE BELTS AS SHOWN VIEW "T."

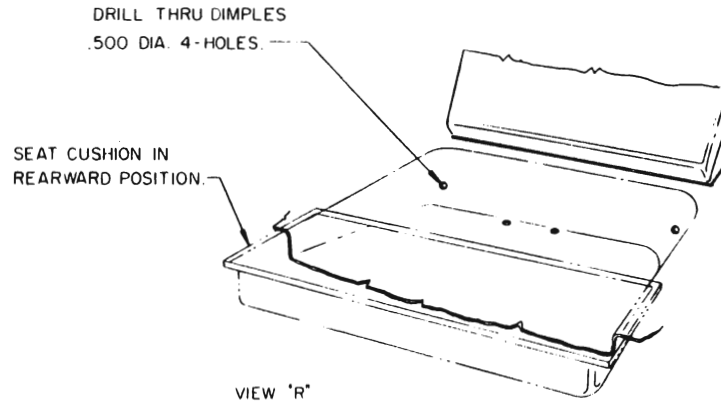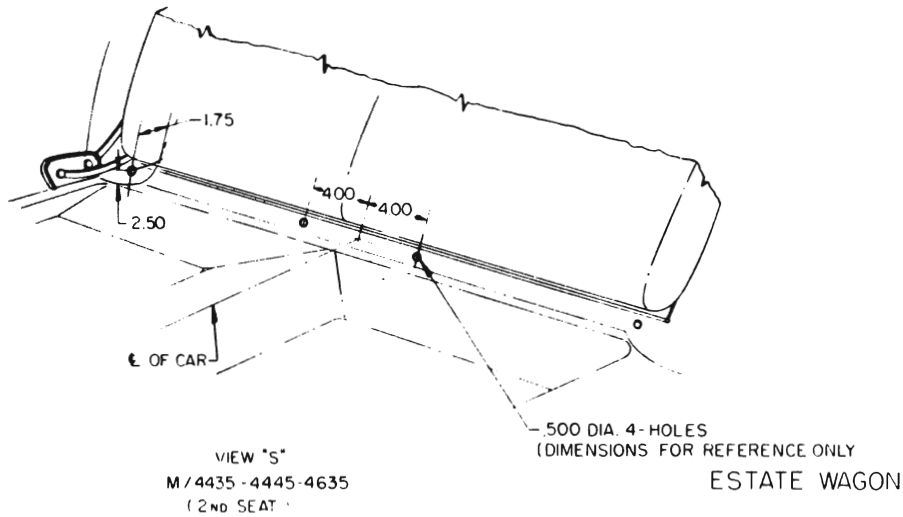

4445  
(3RD SEAT)

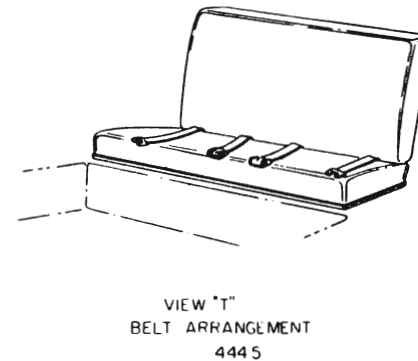


Figure 11-201—Seat Belt Installation—Illustration #6



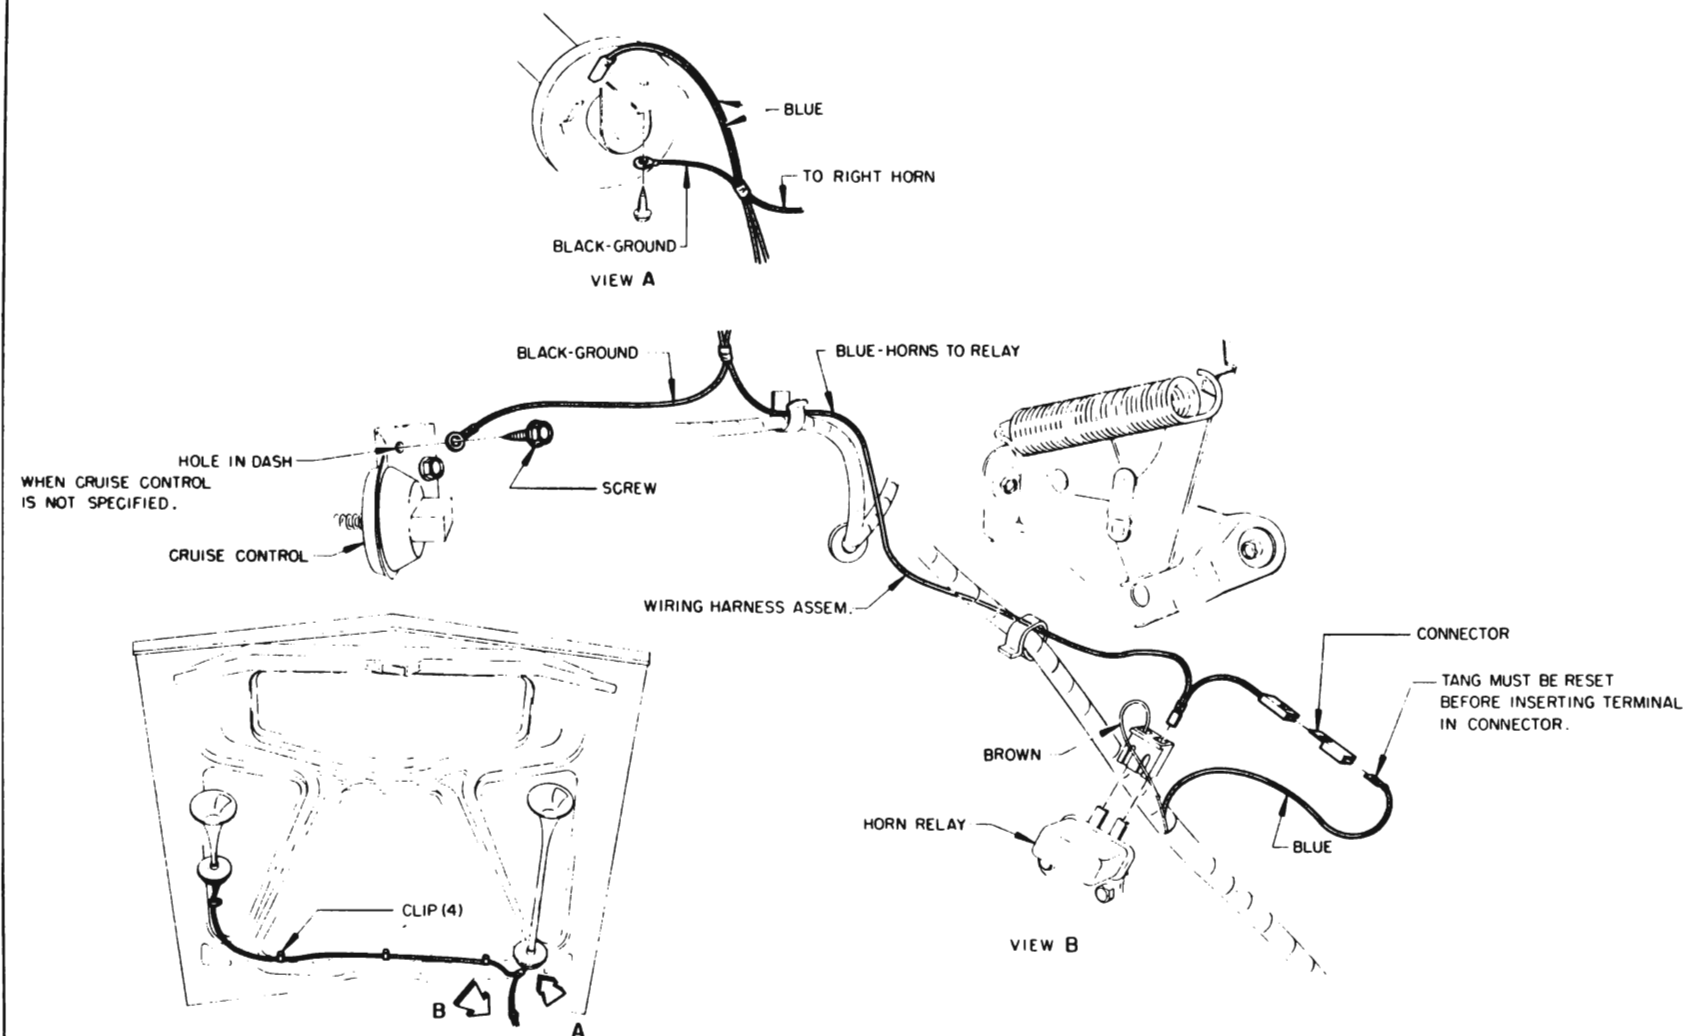


Figure 11-202—Four Note Horn Wiring—4700 Series

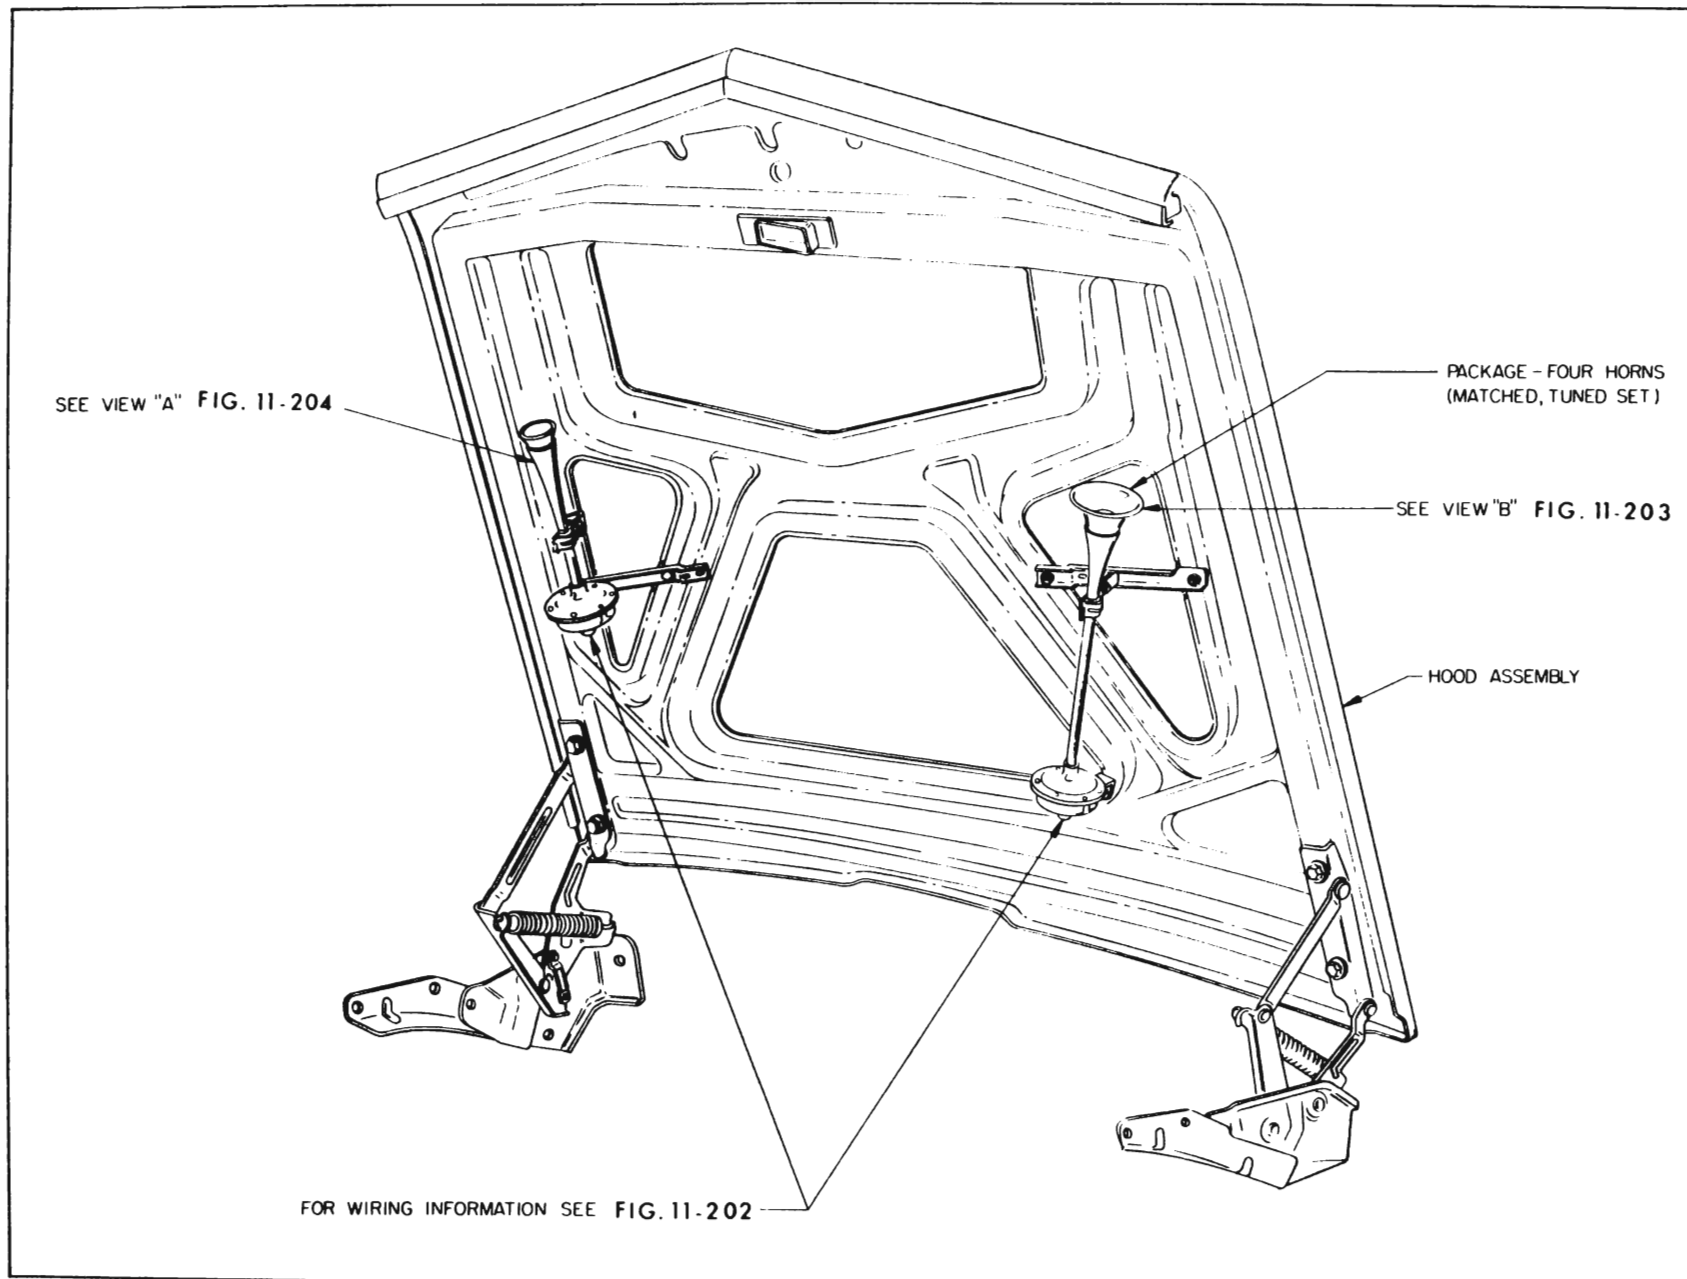


Figure 11-203—Four Note Horn Installation—4700 Series

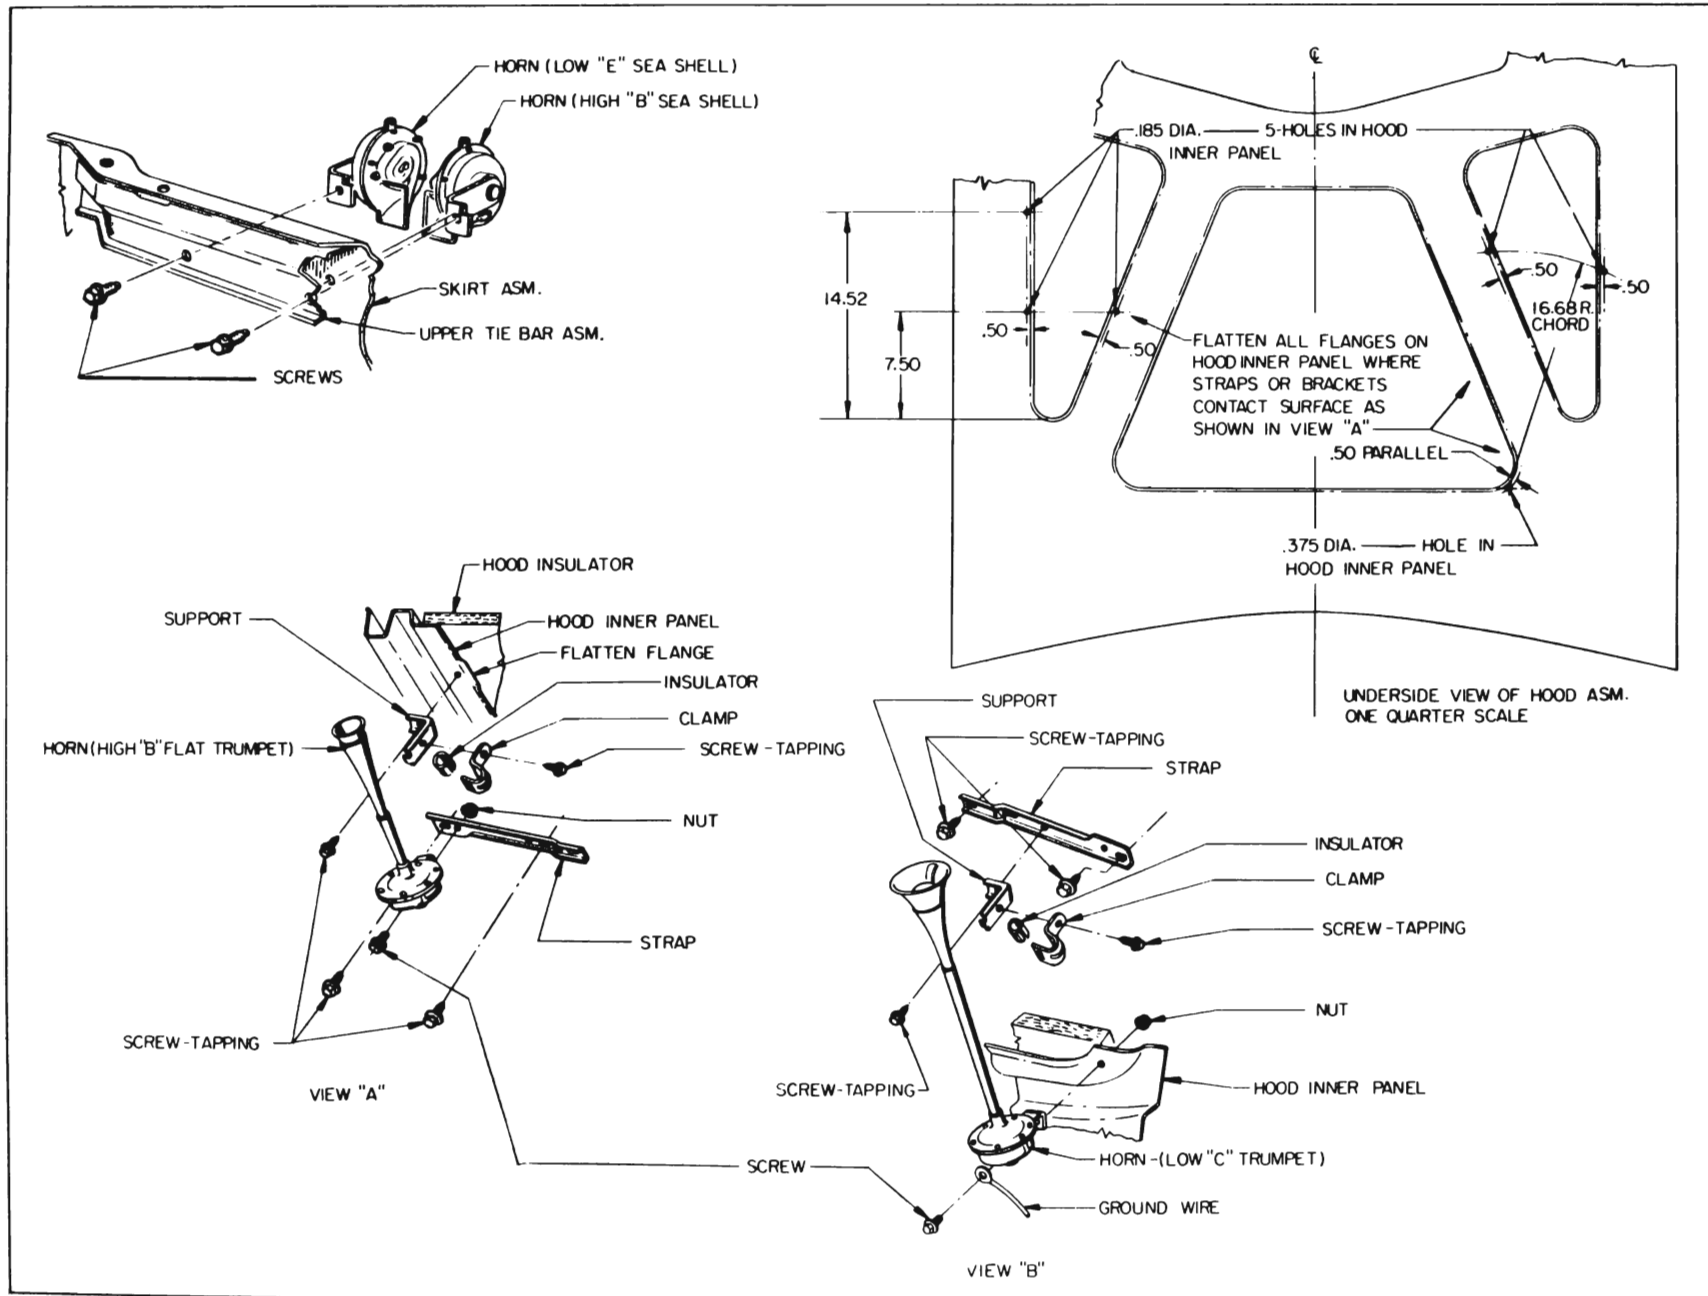


Figure 11-204—Four Note Horn Installation—4700 Series